


SLIDER (woven)

TECHNICAL DATA

COMPOSITION	64% Meta-Aramid, 31% Viscose FR, 3.5% Para-Aramid, 1.5% Antistatic
ARTICLE	6002 - Slider 120
WEIGHT (g/m ²)	120 (±10)
WIDTH (cm)	min. 160
CONSTRUCTION	Sateen
TENSILE STRENGTH EN ISO 13934-1	Warp > 650 N Weft > 400 N
TEAR STRENGTH EN ISO 13937-2	Warp > 30 N Weft > 40 N
DIMENSIONAL CHANGE ISO 6330/ISO 5077	< %3

Natural Finish, Water Repellant Finish or Wicking Finish Available

PROTECTION LEVEL

 HEAT AND FLAME PROTECTION EN ISO 11612	A1, A2**
 ELECTROSTATIC PROTECTION EN 1149-3 & EN 1149-5	PASS**
 FIREFIGHTING PROTECTION EN 469	PASS**
 WILDLAND FIREFIGHTING PROTECTION EN 15384	PASS**
 LIQUID CHEMICALS EN 13034	N/A


* With Water Repellant Finish Only

** Tested After 50 Industrial Washes

CLEANING INSTRUCTIONS



Colours

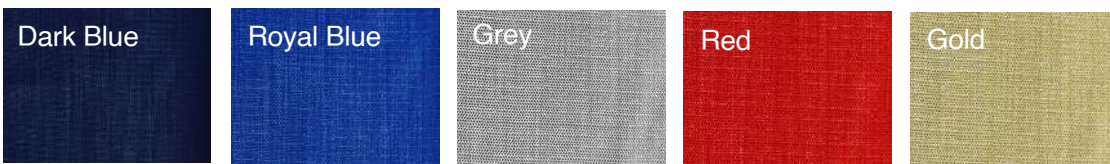

AKATEK