

# FIRE-BLOCKER (knitted)

## TECHNICAL DATA

COMPOSITION	93% Meta-Aramid, 5% Para-Aramid, 2% Antistatic			
ARTICLE	408 - FIRE-BLOCKER K 190	381 - FIRE-BLOCKER K 190	322 - FIRE-BLOCKER K 240	395 - FIRE-BLOCKER K 270
WEIGHT (g/m <sup>2</sup> )	190 (±5%)	190 (±5%)	240 (±5%)	270 (±5%)
WIDTH (cm)	190 (±5)	160 (±5)	160 (±5)	190 (±5)
CONSTRUCTION	Single Jersey	Interlock	Interlock	Single Jersey, One Side Brushed
BURSTING RESISTANCE EN ISO 13938-1	300 kPa	300 kPa	350 kPa	370 kPa


## PROTECTION LEVEL

HEAT AND FLAME PROTECTION ISO 11612	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, F1
ELECTROSTATIC PROTECTION EN 1149-3 & EN 1149-5	PASS	PASS	PASS	PASS
ELECTRIC ARC PROTECTION (BOX TEST) IEC 61482-2	APC 1 (4kA)	APC 1 (4kA)	APC 1 (4kA)	APC 1 (4kA)
ELECTRIC ARC PROTECTION (OPEN ARC) IEC 61482-2	N/A	N/A	ATPV 8,5 cal/cm <sup>2</sup>	N/A
LIQUID CHEMICALS EN 13034	N/A	N/A	N/A	N/A

## CLEANING INSTRUCTIONS



## Colours

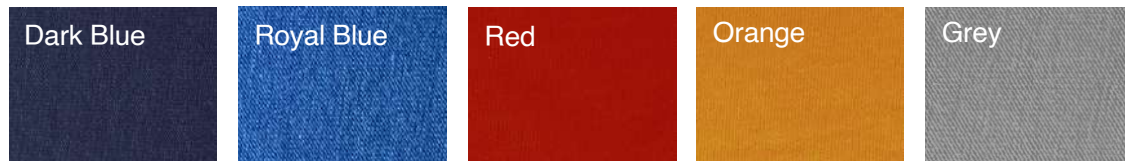

AKATEK