







OPTI-TEX (woven)

TECHNICAL DATA

COMPOSITION	39% Modacrylic, 25% Modal, 17% Meta-Aramid- 9% PA 6.6, 8% Para-Aramid, 2% Antistatic
ARTICLE	521 - Opti-Tex W 220 RS
WEIGHT (g/m ²)	220 (±5%)
WIDTH (cm)	160 (±2)
CONSTRUCTION	2/1 Twill Ripstop
TENSILE STRENGTH EN ISO 13934-1	Warp > 700 N Weft > 600 N
TEAR STRENGTH EN ISO 13937-2	Warp > 25 N Weft > 25 N
ABRASION RESISTANCE EN ISO 12947-2 (12kPa)	> 40000 cycle

Natural Finish, Water Repellant Finish or Wicking Finish Available

PROTECTION LEVEL


 HEAT AND FLAME PROTECTION ISO 11612	A1, A2, B1, C1, F1
 ELECTROSTATIC PROTECTION EN 1149-3 & EN 1149-5	PASS
 ELECTRIC ARC PROTECTION (BOX TEST) EN 61482-2	N/A
 ELECTRIC ARC PROTECTION (OPEN ARC) EN 61482-2	N/A
 WELDING PROTECTION EN ISO 11611	N/A
 LIQUID CHEMICALS EN 13034	N/A

* With Water Repellant Finish Only

CLEANING INSTRUCTIONS



Colours

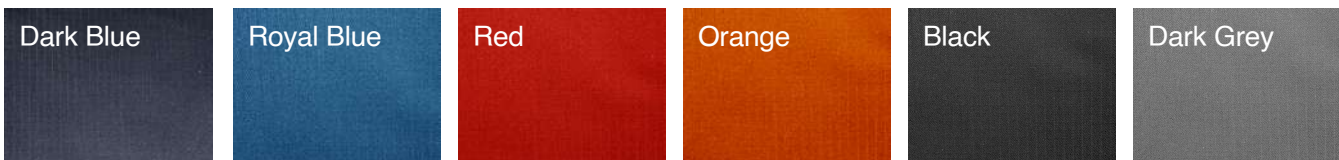

AKATEK